

# INC6006AC1

FOR LOW FREQUENCY AMPLIFY APPLICATION  
SILICON NPN EPITAXIAL TYPE

## DESCRIPTION

INC6006AC1 is a silicon NPN transistor.

It is designed with high voltage.

## FEATURE


- Small package for easy mounting.
- High voltage  $V_{CEO} = 160V$
- Low voltage  $V_{CE(sat)} = 0.2V(\text{MAX})$
- Complementary : INA6006AC1

## APPLICATION

High voltage switching.

## OUTLINE DRAWING

UNIT : mm

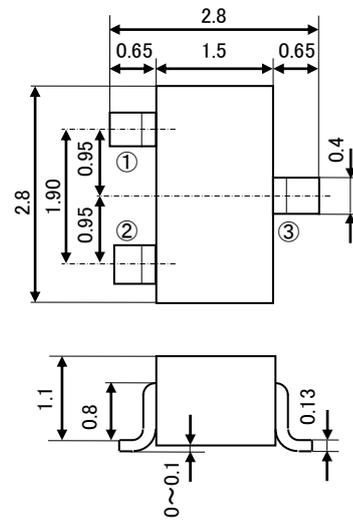

Terminal Connector

JEITA:SC-59

①: Base

JEDEC: Similar to TO-236

②: Emitter

③: Collector


## MAXIMUM RATING (Ta=25°C)

SYMBOL	PARAMETER	RATING	UNIT
$V_{CBO}$	Collector to Base voltage	180	V
$V_{EBO}$	Emitter to Base voltage	6	V
$V_{CEO}$	Collector to Emitter voltage	160	V
$I_C$	Collector current	100	mA
$I_{CM}$	Peak collector current	200	mA
$P_C$	Collector dissipation(Ta=25°C)	200	mW
		500(*)	
$T_j$	Junction temperature	+150	°C
$T_{stg}$	Storage temperature	-55 ~ +150	°C

\*Mounted on glass epoxy board(46mm × 19mm × 1mm)

## MARKING

Type Name









## ELECTRICAL CHARACTERISTICS (Ta=25°C)

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
$V_{(BR)CBO}$	C to B breakdown voltage	$I_C=100 \mu A, I_E=0mA$	180	-	-	V
$V_{(BR)EBO}$	E to B breakdown voltage	$I_E=10 \mu A, I_C=0mA$	6	-	-	V
$V_{(BR)CEO}$	C to E breakdown voltage	$I_C=1mA, R_{BE}=\infty$	160	-	-	V
$I_{CBO}$	Collector cut off current	$V_{CB}=120V, I_E=0mA$	-	-	100	nA
$I_{EBO}$	Emitter cut off current	$V_{EB}=4V, I_C=0mA$	-	-	100	nA
$h_{FE1}$	DC forward current gain1	$V_{CE}=5V, I_C=1mA$	72	-	-	-
$h_{FE2}$	DC forward current gain2	$V_{CE}=5V, I_C=10mA$	72	-	330	-
$h_{FE3}$	DC forward current gain3	$V_{CE}=5V, I_C=50mA$	27	-	-	-
$V_{CE(sat)1}$	C to E saturation voltage1	$I_C=10mA, I_B=1mA$	-	-	0.15	V
$V_{CE(sat)2}$	C to E saturation voltage2	$I_C=50mA, I_B=5mA$	-	-	0.2	V
$V_{BE(sat)1}$	B to E saturation voltage1	$I_C=10mA, I_B=1mA$	-	-	1.0	V
$V_{BE(sat)2}$	B to E saturation voltage2	$I_C=50mA, I_B=5mA$	-	-	1.0	V
$f_T$	Gain bandwidth product	$V_{CE}=10V, I_E=-10mA$	100	-	300	MHz
Cob	Collector output capacitance	$V_{CB}=10V, I_E=0A, f=1MHz$	-	1.7	6	pF
Cib	Emitter input capacitance	$V_{EB}=0.5V, I_C=0A, f=1MHz$	-	-	20	pF

# INC6006AC1





FOR LOW FREQUENCY AMPLIFY APPLICATION  
SILICON NPN EPITAXIAL TYPE

## TYPICAL CHARACTERISTICS

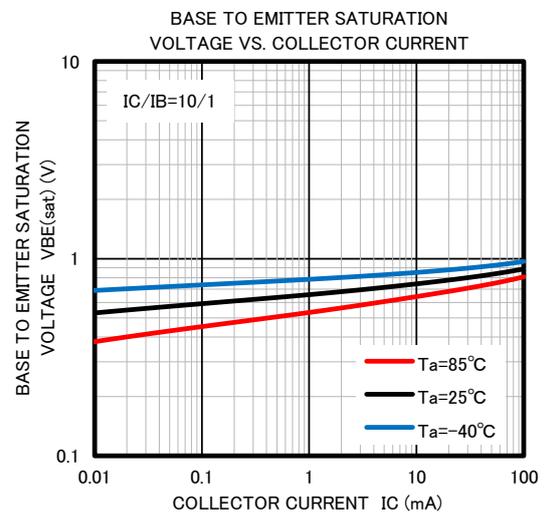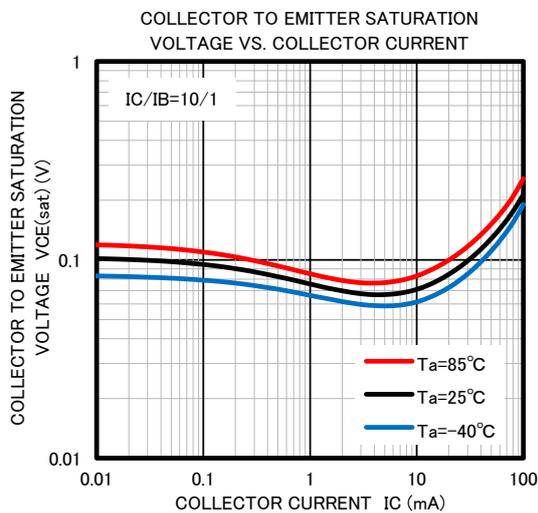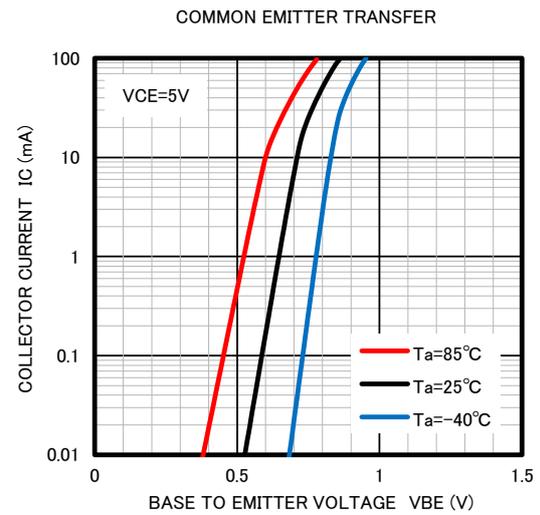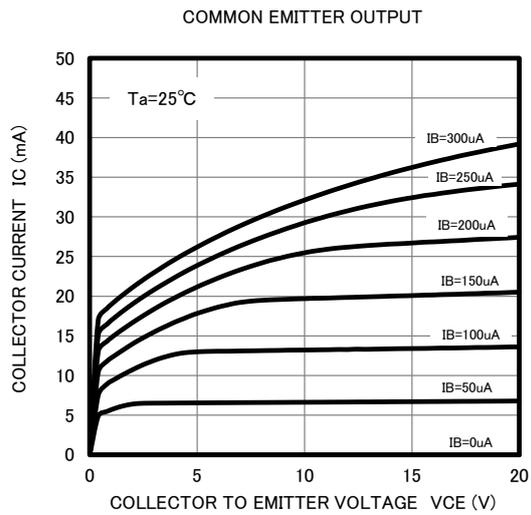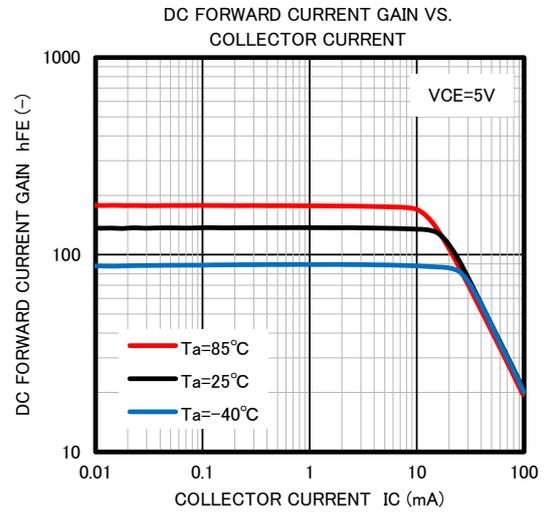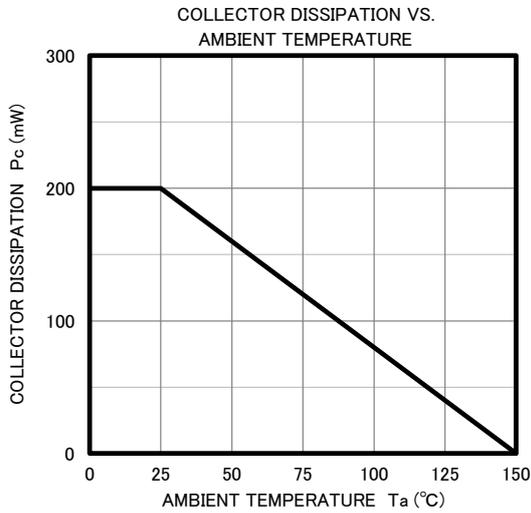

# INC6006AC1

FOR LOW FREQUENCY AMPLIFY APPLICATION  
SILICON NPN EPITAXIAL TYPE

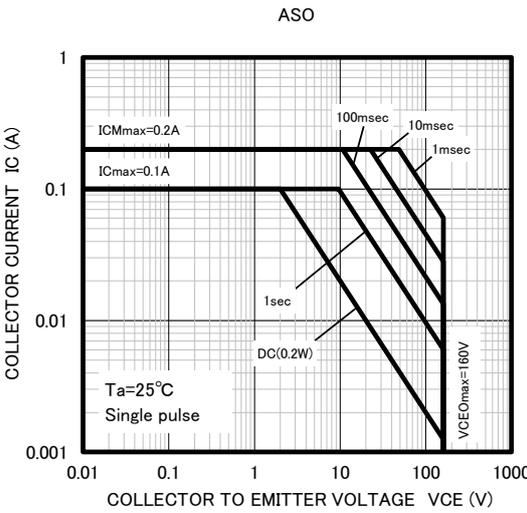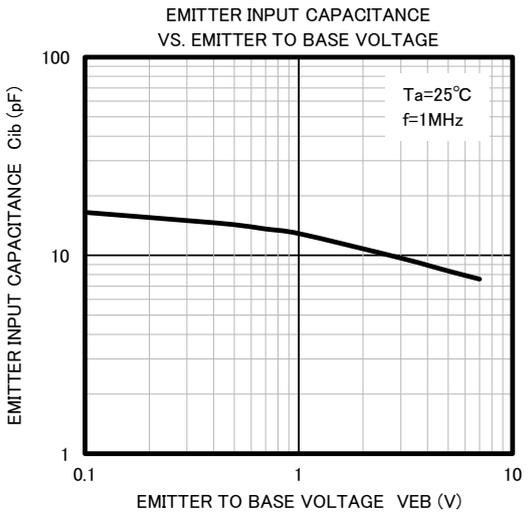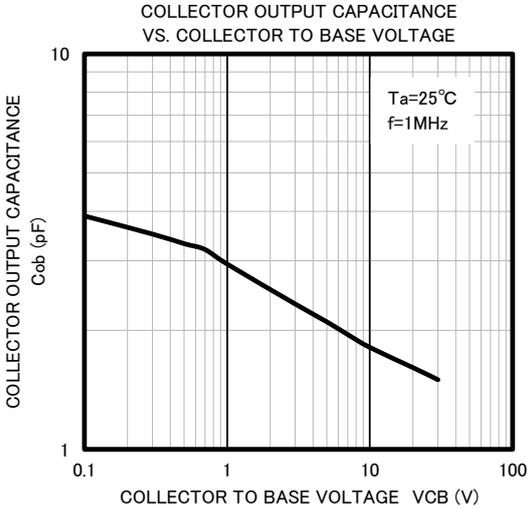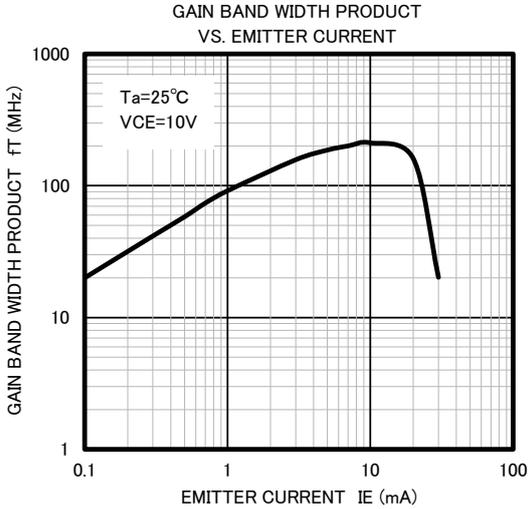

---

**Keep safety first in your circuit designs!**

·ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

**Notes regarding these materials**

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or authorized ISAHAYA products distributor for further details on these materials or the products contained therein.